

## Details:

- LinearLight 2W-WD4.4 is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2W-WD4.4 is provided an output of 330lm/ft @ 3000k
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

## Physical Features:


- Factory cut lengths to 2.19" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

## Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)



## Profile:

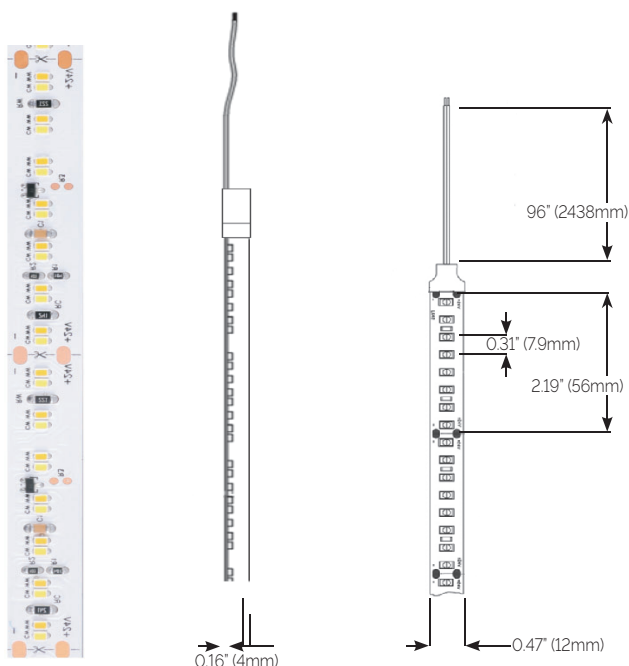

## Specifications:

Average Power Consumption	4.4W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	2.19°
Diodes per foot	76
Max. Run	16ft.
IP Rating	IP68 (wet location)
Dimensions	0.47"W x 0.04"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
3000K	330	75

## Ordering Information:

Example:  
L2W-SW4.4-18/30-32'

Model:  — CCT:  — Length:  — Transformer/PSU:

**L2W-WD4.4** 4.4W/ft.      **18** 1800K, 90CRI      **1'-16'** SPECIFY CUSTOM      **TXXX** SPECIFIED SEPARATELY  
**30** 3000K, 98CRI      **C** CUSTOM

**22** 2200K, 90CRI  
**30** 3000K, 98CRI



LM-80

