

## Details:

- LinearLight 2-SW3.8HE is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-SW3.8HE is provided in outputs up to 660m/ft.
- Stocked in 32' lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

## Physical Features:


- Factory cut lengths to 1.31" Increments with run length up to 32'.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

## Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)



## Profile:

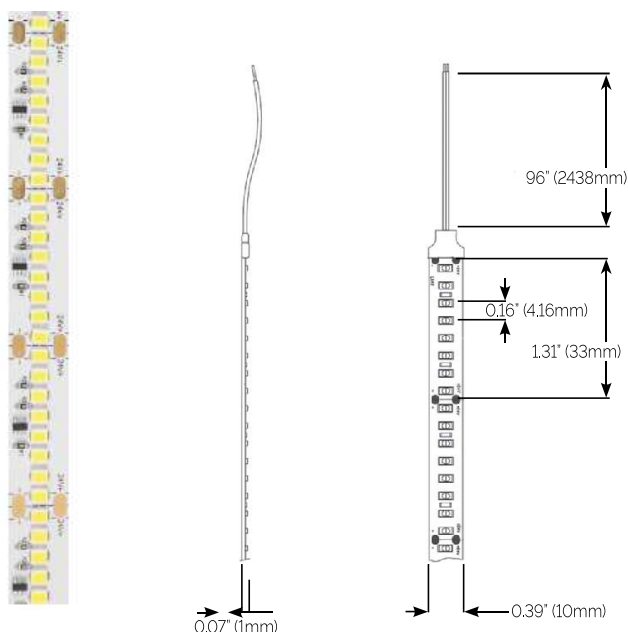

## Specifications:

Average Power Consumption	3.8W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	1.31"
Diodes per foot	73
Max. Run	32ft.
IP Rating	IP20 (Class II dry location)
Dimensions	0.39"W x 0.07"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
1800K @90CRI	544	143
2200K @90CRI	560	147
2400K @95CRI	571	150
2700K @98CRI	595	156
3000K @98CRI	608	160
3500K @98CRI	627	165
4000K @98CRI	660	173

## Ordering Information:

Example:  
L2-SW3.8HE-30-32'

Model:

**L2-SW3.8HE** 3.8W/ft.

CCT:

**18** 1800K, 90CRI  
**22** 2200K, 90CRI  
**24** 2400K, 95CRI  
**27** 2700K, 98CRI  
**30** 3000K, 98CRI  
**35** 3500K, 98CRI  
**40** 4000K, 98CRI

Length:

**1'-16'** SPECIFY  
**C** CUSTOM

Transformer/PSU

**TXXX** SPECIFIED  
SEPARATELY