

## Details:

- LinearLight 1-TW2.9 is a versatile tunable white LED strip in our smallest profile, with best-in-class CRI available for a variety of applications. Linear Light 1-TW2.9 is provided in an output of 200lumens/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

## Physical Features:


- Factory cut lengths to 0.8" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE1 Profiles.
- 96" Power Leads

## Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)



## Profile:

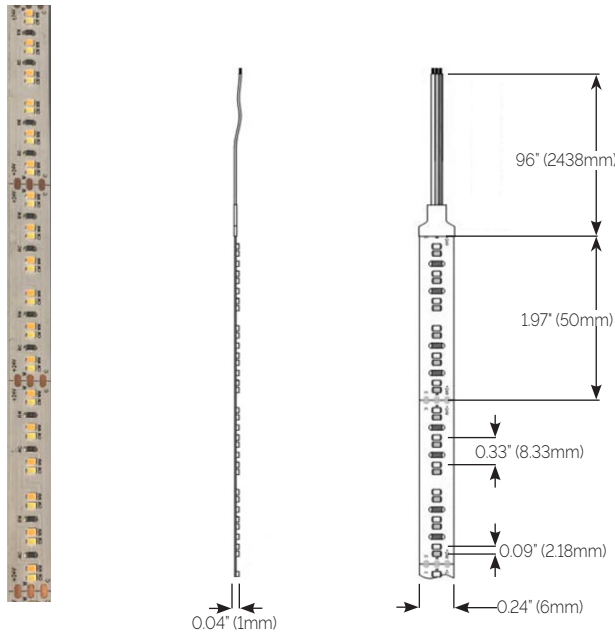

## Specifications:

Average Power Consumption	2.9W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	0.8"
Diodes per foot	91
Max. Run	16ft.
IP Rating	IP20 (Class II dry location)
Dimensions	0.24"W x 0.04"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
2700K, 6500K @98CRI	200	69
1800K@90CRI, 4000K @98CRI	200	69

## Ordering Information:

Example:  
L1-TW2.9-30-12'

Model:  - CCT:  - Length:  - Transformer/PSU:

**L1-TW2.9** 2.9W/ft.    **27/65** 2700K/6500K  
**18/40** 1800K/4000K    **1'-16'** SPECIFY CUSTOM  
**C**    **TXXX** SPECIFIED SEPARATELY