

Cosmo Graze Series - Static White

CONVEY

Details:

- Linkable straight sections with hidden connections allowing for end to end installation.
- Product is IP67 Rated for indoor and outdoor use.
- Multiple optics for various applications.

Features:

- Maximum 32.8' connection on a single power feed.
- Mounting via fixed clips, rotatable brackets and option glare shields.
- Power Leads and Connectors included at no charge based on your run specifications.

Lighting Features:

- Specy beam spread for the application.
- 50,000hr. Life (L70) Indoors and 36,000hr Outdoors
- 90CRI Standard
- TM-30 data available at www.conveylighting.com



RGBW and DMX-SPI available

Applications:




Specifications:

Average Power Consumption	8w(12"), 15w(24"), 26w(40"), 30w(48")
Voltage	24v DC
Binning	3 step
Sizing Available	12" / 24" / 40" / 48"
Lumens	Varies based on Optic. See Below
Max. Connection	32.8'
IP Rating	IP67 Standard

Lumens	12"/8w	24"/15w	40"/26w	30w/48"
15 Degree	800lm	1500lm	2600lm	3000lm
30 Degree	900lm	1690lm	2750lm	3170lm
45 Degree	988lm	1840lm	3170lm	3670lm
60 Degree	900lm	1690lm	2750lm	3170lm
120 Degree	500lm	940lm	1690lm	1960lm

Dimensions:

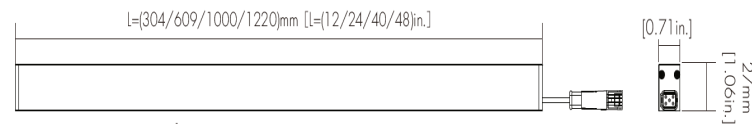

Ordering Information:

Example:
COSMO-GRAZE-SW-12-24K-24V-15D-ADJ60D

Model: Length: CCT(White): Voltage: Optic: Mounting:

COSMO-GRAZE-SW	12 12" 24 24" 40 40" 48 48"	24K 2400K, 27K 2700K, 30K 3000K, 35K 3500K, 40K 4000K, 50K 5000K, 65K 6500K,	24 24v	15 Degrees 30 45 60 120	CLIP Mounting Clip ADJ60 Adjustable 60D ADJ90 Adjustable 90D ADJ180 Adjustable 180D GLRFX Glare Shield, Fixed GLRADJ Glare Shield, Adjustable
-----------------------	--	---	---------------	--	--




LM-80




Mounting Options:


CLIP (Fixed Surface Clip)

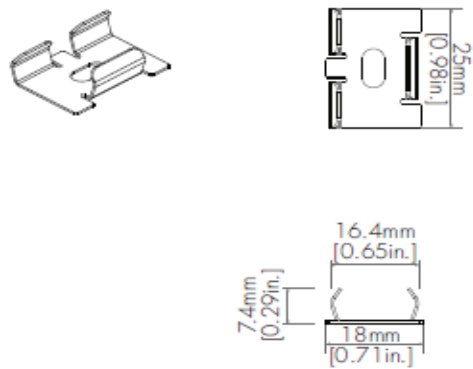


ADJ60 (Adjustable to 60 Degrees)

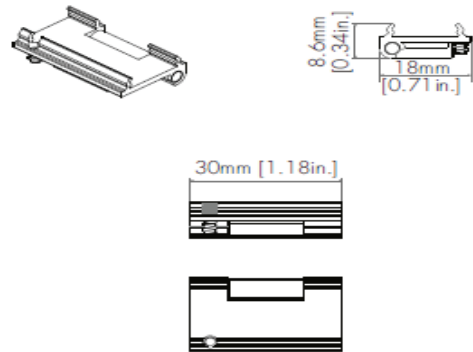


ADJ90 (Adjustable to 90 Degrees)

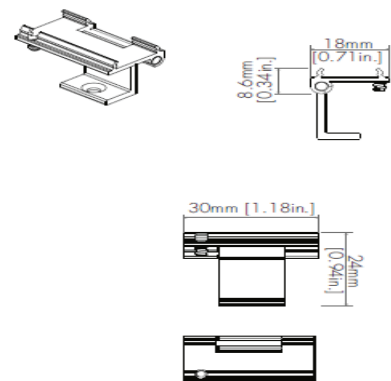

ADJ180 (Adjustable to 90 Degrees)

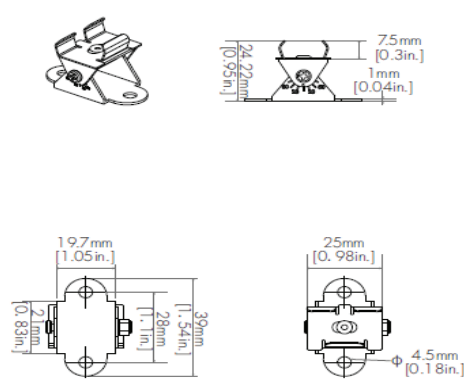

GLRFX (Fixed Glare Shield)

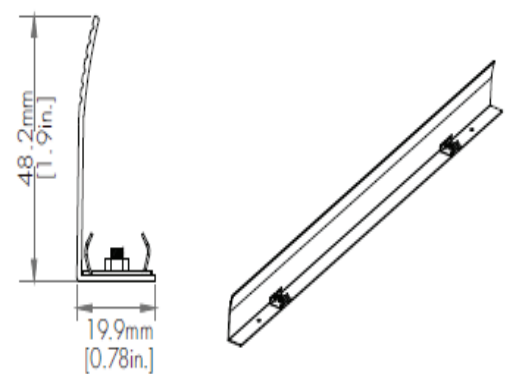

GLRADJ (Adjustable to 90 Degrees Glare Shield)

