

## Details:

- LinearLight 2W-TW4.4 is a small profile, IP68 wet listed tunable white LED strip with best-in-class CRI available for a variety of applications. LinearLight 2W-TW4.4 is provided in an output of 259lm/ft.
- Stocked in 192' lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

## Physical Features:


- Factory cut lengths to 1.64" Increments.
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

## Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)



## Profile:

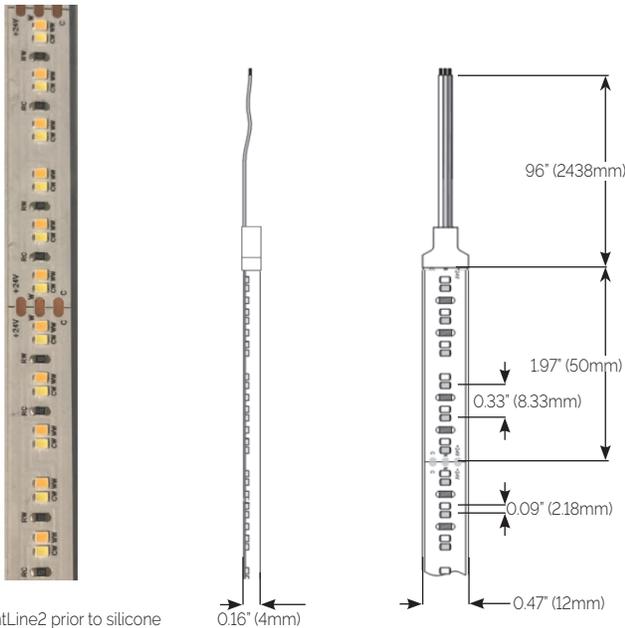

\*Image of LightLine2 prior to silicone injection process for IP68 rating

## Specifications:

Average Power Consumption	4.4W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	1.97"
Diodes per foot	73
Max. Run	16ft.
IP Rating	IP68 (Class II wet location)
Dimensions	0.47"W x 0.16"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
2700K, 6500K @98CRI	259	59
2200K@90CRI, 4000K @98CRI	259	59
2200K@90CRI, 3000K @98CRI	259	59

## Ordering Information:

Example:  
L2W-TW4.4-27/65-30'

Model:	CCT:	Length:	Transformer/PSU
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>L2W-TW4.4</b> 4.4W/ft.	<b>27/65</b> 2700K/6500K <b>22/40</b> 2200K/4000K <b>22/30</b> 2200K/3000K	<b>1'-16'</b> SPECIFY <b>C</b> CUSTOM	<b>TXXX</b> SPECIFIED SEPARATELY

LM-80

