

Flex2 Aqua Side Bend (SB) RGBW 4.3w

CONVEY

Details:

- Flexible Side Bendable LED profile.
- Standard product is IP68 Rated for indoor and outdoor use in Pools with UL676 certification.
- "Dot" Free illumination.

Features:


- Cut Segments in any length up to 16.4'
- Mounting via brackets, clips, and straight channel.
- Factory Cutting only. This product cannot be field cut or modified.
- Standard with 157" Factory applied power feed.
- Available in White Finish.

Lighting Features:

- 120° beam spread
- 3 Year Warranty (*)
- 90CRI Standard
- TM-30 data available at www.conveylighting.com





Feed Options:

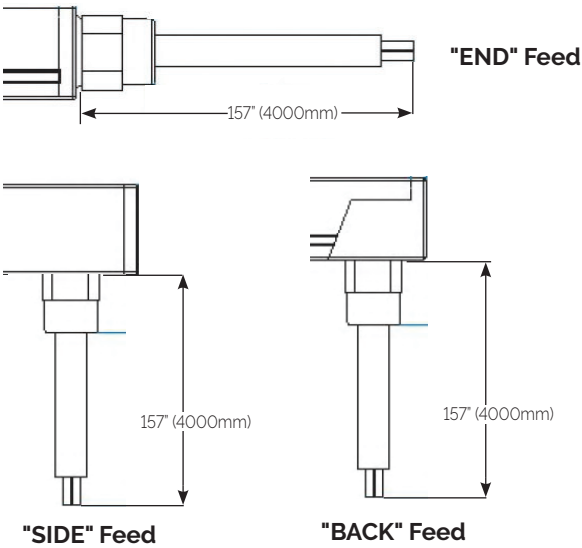

Specifications:

| | |
|---------------------------|--------------------------------|
| Average Power Consumption | 4.3W per Foot |
| Voltage | 24V |
| Binning | 3 step |
| Cut Increment | Any Length cutting up to 16.4' |
| Lumens @ 4000k / 90CRI | 91lm/ft |
| Max. Connection | 16.4' |
| IP Rating | IP68 Standard / UL676 Pools |
| Beam Angle | 120 Degrees |

Sectional View

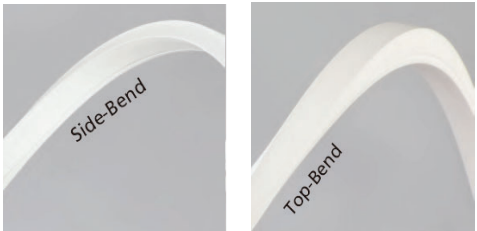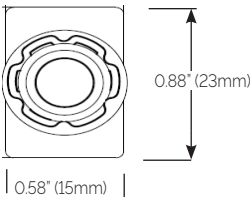


Refer to Top Bend (TB) Spec Sheet

Ordering Information:

Example:
FLEX2-AQUA-SB-RGBW-27/65-24-E-MB

| | | | | |
|------------------------------|--|----------------------|---|--|
| Model: | CCT(Warm/Cool): | Voltage: | Feed Type: | Mounting: |
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
| FLEX2-AQUA-SB-RGBW4.3 | 27 2700K 90CRI 30 3000K 35 3500K 40 4000K | 24 24V DC | E End Feed S Side Feed B Back Feed | MC Clip MB Bracket MPS Profile Straight |

Mounting:



Higher than 40k available as special order
Minimum purchase may apply