

Flex2 Aqua Side Bend (SB) Static White 4.3w

Details:

- Flexible Side Bendable LED profile.
- Standard product is IP68 Rated for indoor and outdoor use in Pools.
- *Dot* Free illumination.

Features:


- Cut Segments in any length up to 16.4'
- Mounting via brackets, clips, and straight channel.
- Factory Cutting only. This product cannot be field cut or modified.
- Standard with 157" Factory applied power feed.
- Available in White Finish.

Lighting Features:

- 120° beam spread
- 3 Year Warranty (*)
- 90CRI Standard
- TM-30 data available at www.conveylighting.com





Feed Options:

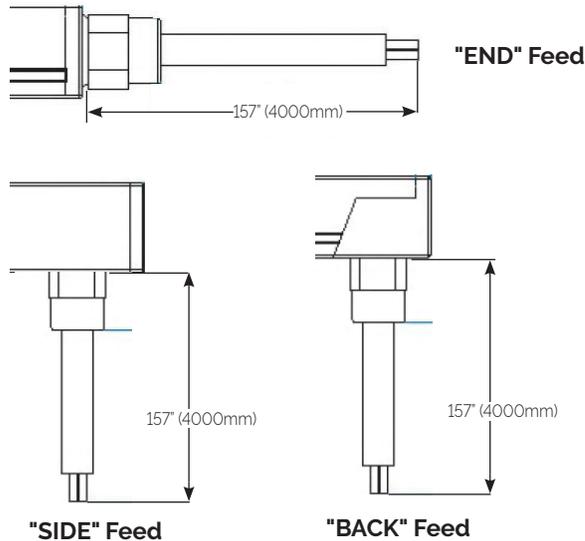

Specifications:

Average Power Consumption	4.3W per Foot
Voltage	24V
Binning	3 step
Cut Increment	Any Length cutting up to 16.4'
Lumens @ 4000k / 90CRI	146lm/ft
Max. Connection	16.4'
IP Rating	IP68 Standard
Beam Angle	120 Degrees

Sectional View

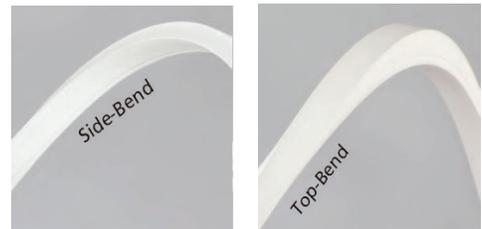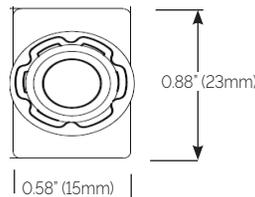


Refer to Top Bend (TB) Spec Sheet

Ordering Information:

Example:
FLEX2-AQUA-SB-SW4.3-27-24-E-MB

Model:	CCT(White):	Voltage:	Feed Type:	Mounting:
<input type="text" value="FLEX2-AQUA-SB-SW4.3"/>	<input type="text" value="18 1800K 90CRI"/>	<input type="text" value="24 24V DC"/>	<input type="text" value="E End Feed"/>	<input type="text" value="MC Clip"/>
	<input type="text" value="22 2200K, 90CRI"/>		<input type="text" value="S Side Feed"/>	<input type="text" value="MB Bracket"/>
	<input type="text" value="24 2400K, 90CRI"/>		<input type="text" value="B Back Feed"/>	<input type="text" value="MPS Profile Straight"/>
	<input type="text" value="27 2700K, 90CRI"/>			
	<input type="text" value="30 3000K, 90CRI"/>			
	<input type="text" value="35 3500K, 90CRI"/>			
	<input type="text" value="40 4000K, 90CRI"/>			

Mounting:

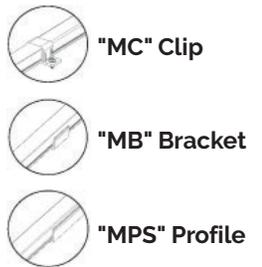

Higher than 40k available as special order
Minimum purchase may apply