Flex3 RGBW 5w

CONVEY

Details:

- Flexible and Dual Axis Bendable LED profile.
- Standard product is IP67 Rated for indoor and outdoor use.
- "Dot" Free

Features:

- Cut Segments in 2.46"
- Mounting via brackets, clips, straight or curved channel.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70) Indoors and 36,000hr Outdoors
- TM-30 data available at www.conveylighting.com

Also available in Static White, Tunable White and Warm Dim Options

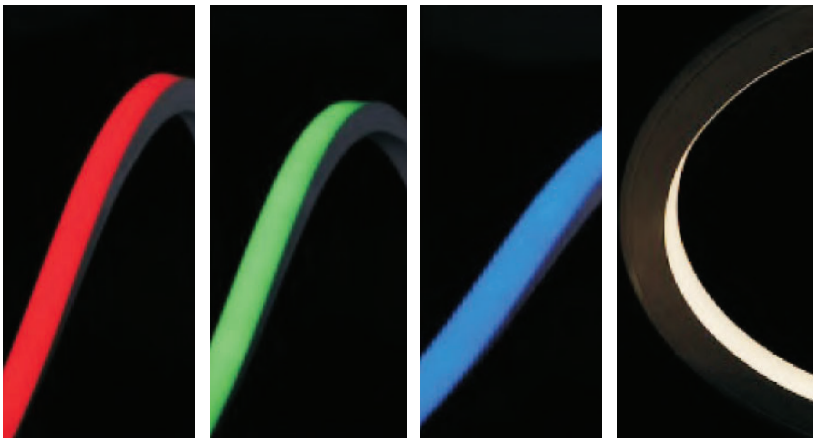

Feed Options:

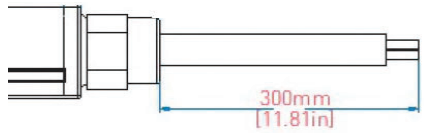

"END" Feed



"SIDE" Feed



"BACK" Feed

Specifications:

Average Power Consumption	4.27w per Foot (All Colors On)
Voltage	24v DC
Binning	3 step
Cut Increment	2.46"
Lumens @ All Colors and White On	137lm/ft
Max. Connection	16.4'
IP Rating	IP67 Standard
Beam Angle	120 Degrees

Sectional



Ordering Information:

Example:
FLEX6W-RGBW27-24-S-MPF

Model:	RGB+White:	Voltage:	Feed Type:	Mounting:
FLEX3-5W	**RGBW27** RGB+27K **RGBW30** RGB+30K **RGBW35** RGB+35K **RGBW40** RGB+40K **RGBW50** RGB+50K **RGBW65** RGB+65K	**24** 24v DC	**E** End Feed **S** **Side Feed** **B** **Back Feed**	**MC** Clip **MB** **Bracket** **Profile Straight** **Profile Flexible**

Mounting:

"MC" Clip

"MB" Bracket

"MPS" Profile

"MPF" Profile

LM-80

Convey Lighting
101 Hammer Mill Road,
Rocky Hill, CT 06067

www.conveylighting.com

info@conveylighting.com