

## Details:


- LinearLight 2-TW-PRO-4.6 is a small profile, versatile, tunable white LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-TW-PRO-4.6 is provided in an output up to 574lm/ft. Three CCT LED strip closely follows the Black Body Curve.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

## Physical Features:


- Factory cut lengths to 2.46" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

## Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)

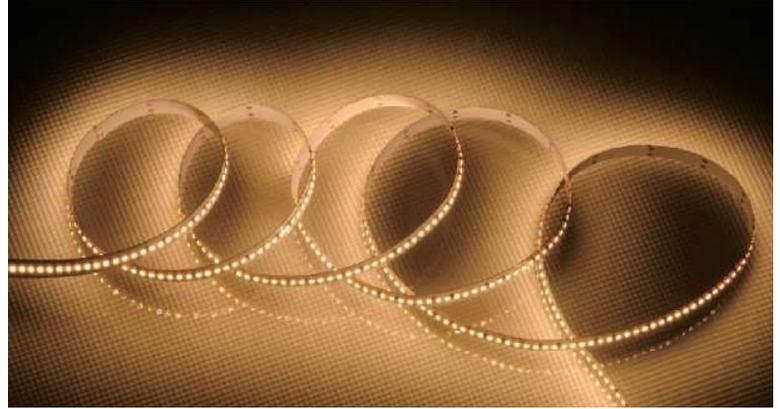

## Profile:

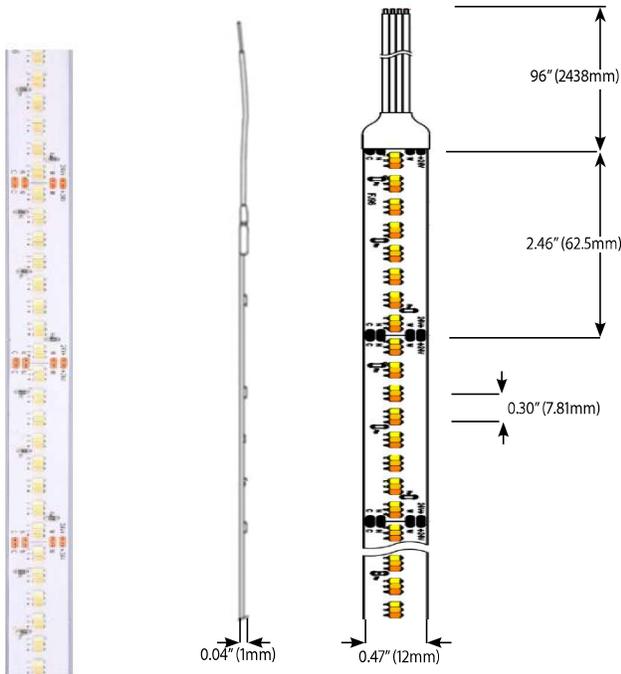

## Specifications:

Average Power Consumption	4.6W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	2.46"
Diodes per foot	117
Max. Run	16ft.
IP Rating	IP20 (Class II dry location)
Dimensions	0.42"W x 0.04"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
1800K @90 CRI	155	101
3000K @98CRI	182	118
6500K @ 98CRI	237	154

## Ordering Information:

Example:  
L2-TW-PRO-4.6-18/30/65

Model:

L2-TW-PRO-4.6 4.6W/ft.

CCT:

18/30/65 1800K/3000K/6500K

Length:

1'-16'  
C SPECIFY  
CUSTOM

Transformer/PSU

TXXX SPECIFIED  
SEPARATELY