

**Details:**

- LinearLight 3-SW3.0 is a medium profile, versatile, high efficacy LED strip with best-in-class CRI available for a variety of applications. LinearLight 3-SW3.0 is provided in outputs ranging from 409lm/ft. to 525lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

**Physical Features:**


- Factory cut lengths to 1.97" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE3 or BE4 Profiles.
- 96" Power Leads

**Lighting Features:**

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty



**Profile:**

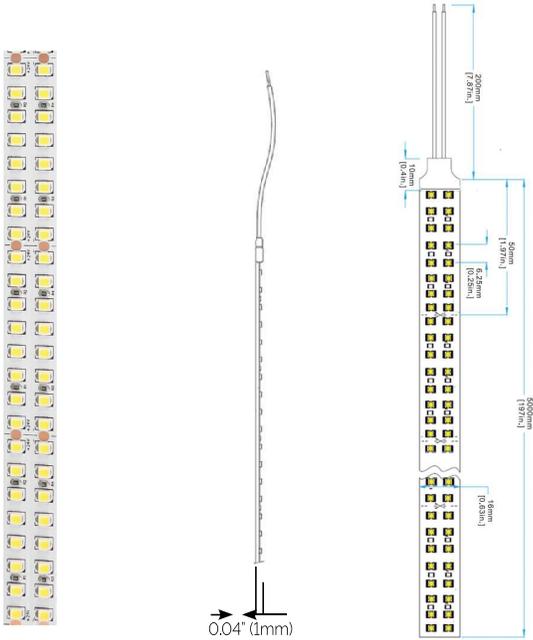

**Specifications:**

Average Power Consumption	3.0W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	1.97"
Diodes per foot	96
Max. Run	16ft.
IP Rating	IP20 (Class II dry location)
Dimensions	0.63"W x 0.04"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
1800K @90CRI	409	136
2200K @90CRI	430	144
2400K @95CRI	441	147
2700K @98CRI	462	154
3000K @98CRI	472	157
3500K @98CRI	498	166
4000K @98CRI	525	175

**Ordering Information:**

Example:  
L3-SW3.0-30-16'

Model:  - CCT:  - Length:  - Transformer/PSU:

**L3-SW3.0** 3.0W/ft.    **18** 1800K, 90CRI    **1'-16'** SPECIFY CUSTOM    **TXXX** SPECIFIED SEPARATELY

**22** 2200K, 90CRI    **C**    **24** 2400K, 95CRI    **27** 2700K, 98CRI    **30** 3000K, 98CRI    **35** 3500K, 98CRI    **40** 4000K, 98CRI

