

Flex Static White 4w - Top Bend AC 120v

CONVEY

Details:

- Bendable LED profile - Top Bend (Not Dual Axis or Side Bend)
- Standard product is IP65 Rated for indoor and outdoor use.
- "Dot" Free and Dimmable.

Features:

- Cut Segments 0.66ft
- Mounting via brackets, clips, straight or curved channel.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.


Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70) Indoors and 36,000hr Outdoors
- 85CRI Standard
- TM-30 data available at www.conveylighting.com

Also available in Colors and Side Bend - Contact Factory for Details




Feed Options:

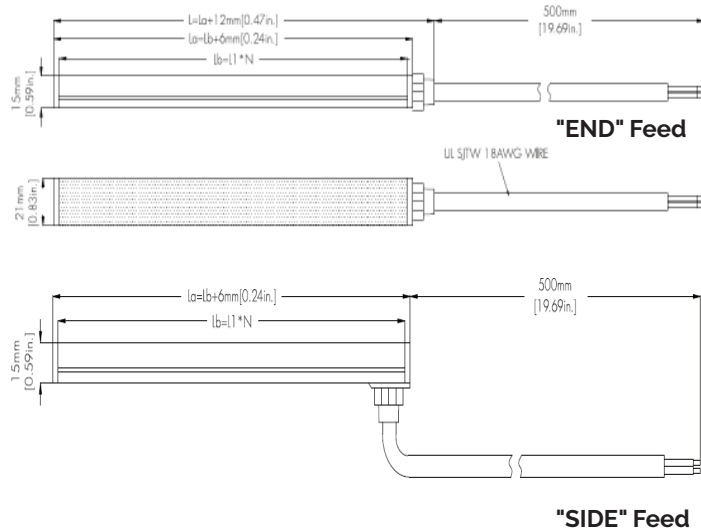

Specifications:

Average Power Consumption	4.2w per Foot
Voltage	120v AC - No Driver
Binning	3 step
Cut Increment	0.66ft Increments
Lumens @ 4000k / 90CRI	216lm/ft
Max. Connection	110-120v - 164ft
IP Rating	IP65 Standard
Beam Angle	120 Degrees

Sectional



Ordering Information:

Example:
FLEX4W-SW-TB-AC-30-AC120-E-MC

Model:

FLEX4W-SW-TB-AC

CCT(White):

27 2700K,90CRI
30 3000K,90CRI
35 3500K,90CRI
40 4000K,90CRI
50 5000K,90CRI
65 6500K,90CRI

Voltage:

AC120 120v AC


Feed Type:

E End Feed
S Side Feed
PE Plug End Feed
PS Plug Side Feed

Mounting:

MC Clip
MB Bracket
MPS Profile Straight
MPF Profile Flexible

Mounting:

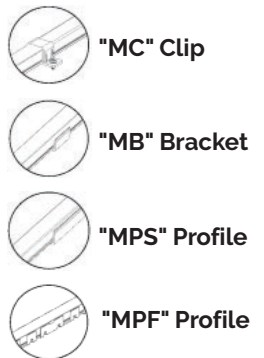

1800k and 2400k available as special order
Minimum purchase may apply



LM-80

