

Details:

- LinearLight 2-SW9.1 is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-SW9.1 is provided in outputs ranging from 850lm/ft. to 1035lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 1.97" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com



Profile:

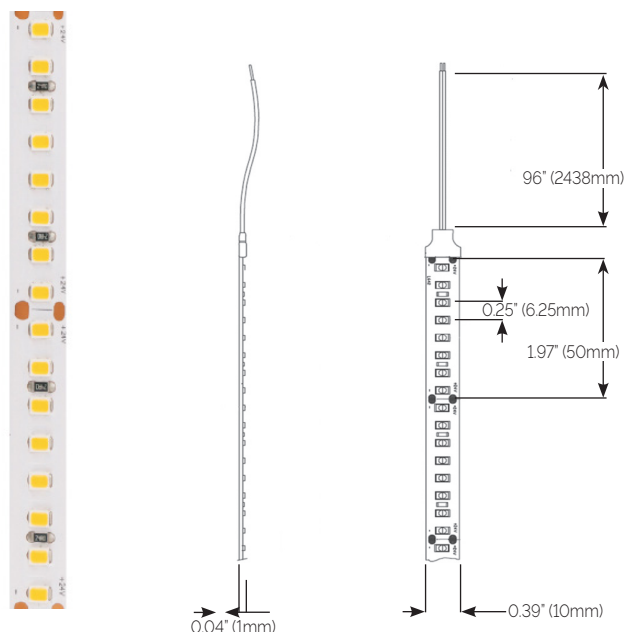

Specifications:

Average Power Consumption	9.1W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	1.97"
Diodes per foot	49
Max. Run	10ft.
IP Rating	IP20 (Class II dry location)
Dimensions	0.39"W x 0.04"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
1800K @90CRI	941	103
2200K @90CRI	850	93
2400K @95CRI	894	98
2700K @98CRI	942	104
3000K @98CRI	983	108
3500K @98CRI	1035	114
4000K @98CRI	1035	114

Ordering Information:

Example:
L2-SW9.1-30-32'

Model: - CCT: - Length: - Transformer/PSU:

L2-SW9.1 9.1W/ft. **18** 1800K, 90CRI **1'-16'** SPECIFY **TXXX** SPECIFIED
22 2200K, 90CRI **C** CUSTOM SEPARATELY
24 2400K, 95CRI
27 2700K, 98CRI
30 3000K, 98CRI
35 3500K, 98CRI
40 4000K, 98CRI

LM-80

