

## Details:

- LinearLight 2-COB is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-COB is provided an average output of 302lm/ft
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

## Physical Features:


- Factory cut lengths to 1/64" Increments with diode free illumination.
- 3M (300LSE) yellow adhesive tape attached on backside, standard.
- Suitable for all BE2 Profiles.
- 96" Power Leads standard.

## Lighting Features:

- 150° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)



## Profile:

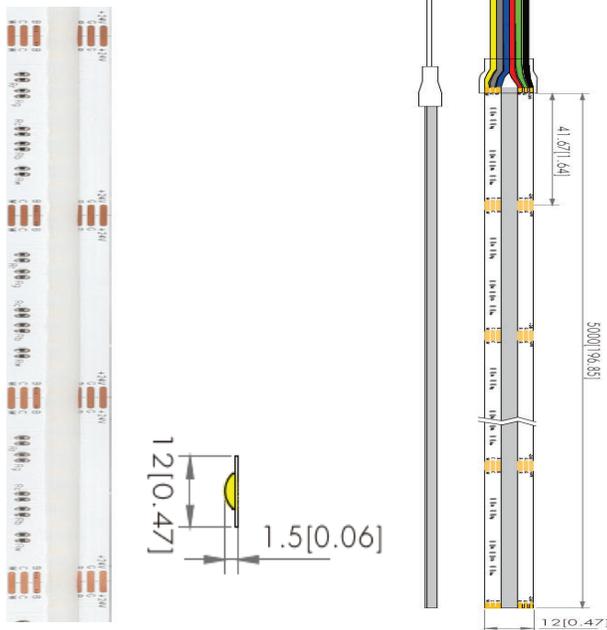

## Specifications:

Average Power Consumption	5.5W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	1.64"
Diodes per foot	256
Max. Run	16ft.
IP Rating	IP20 (Dry location) or IP67 (Wet)
Dimensions	0.47"W x 0.06"H (* See IP67 Note)

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
ALL ON @90CRI	302	55
RED Only	30	18
GREEN Only	78	47
BLUE Only	85	51
2700K Only	85	51

## Ordering Information:

Example:  
L2COB-RGBTW5.5-27/65-14'

Model:  - CCT:  - Length:  - Transformer/PSU:

**L2COB-RGBTW5.5**    5.5W/ft.    **27/65** 2700K-6500K    **1'-16'** SPECIFY CUSTOM    **TXXX** SPECIFIED SEPARATELY

## L2COBW-RGBTW5.5

See Note on IP67

(\* L2COBW IP67 Version dimensions increase to 0.55"W x 0.16"H

**LM-80**  
1 BIN/3-STEP