LinearLight 1-WD2.9

CONVEY

Details:

• LinearLight 1-WD2.9 is a versatile tunable white LED strip in our smallest profile, with best-in-class CRI available for a variety of applications. Linear Light 1-WD2.9 is provided in an output of up 278lumens/ft.
•Stockedin118"lengthsbutcanbefactorycutanddeliveredtoprojectsitebasedon site specific measurements by the Convey Team.



Physical Features:

• Factory cut lengths to 2.81" Increments.
• 3M (300LSE) yellow adhesive tape attached on backside, standard
• Complete factory assembly with any Series BE1 Profiles.
• 96" Power Leads

Lighting Features:

• 120˚ beam spread
• 50,000hr. Life (L70)
• 5 year warranty
• TM-30 data available at www.conveylighting.com

Profile:

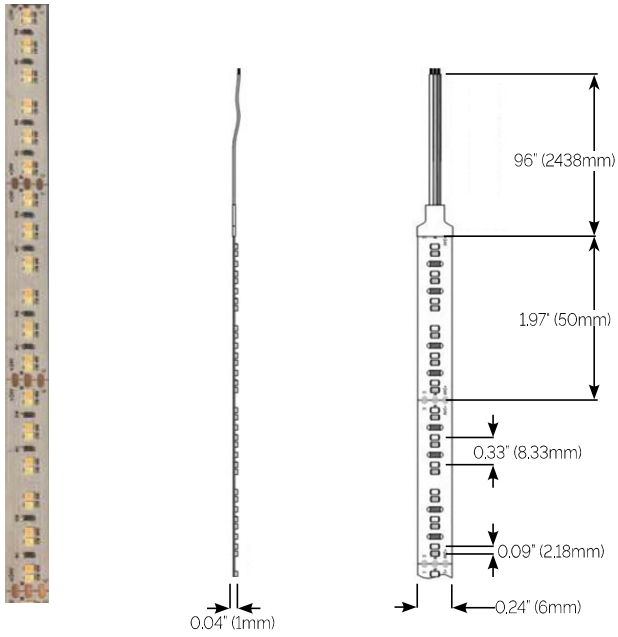

Specifications:

Average Power Consumption	2.9W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	2.81"
Diodes per foot	51
Max. Run	3m (118")
IP Rating	IP20 (Class II dry location)
Dimensions	0.2"W x 0.04"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
3000K @90CRI	278	95
1800K@90CRI (Full Dim)	32	55

Ordering Information:

Example:
L1-WD2.9-30-32'

Model:		CCT:		Length:		Transformer/PSU
L1-WD2.9	2.9W/ft.	18/30	1800K/3000K	1'-16'	SPECIFY
				C	CUSTOM
				TXXX	SPECIFIED SEPARATELY

LM-80

1 BIN/3-STEP

101 Hammer Mill Rd.
Rocky Hill, CT 06067
www.conveylighting.com
info@conveylighting.com